


Battery Butler® 6 Volt Automatic Battery Storage Charger (Part #BBFC200) features:

- Automatic Battery Level Monitoring
- Automatic On / Off Switching of Charge
- Automatic Battery Maintaining of Peak Charge
- Solid-State Circuitry
- Regulated Output Voltage
- Red LED AC Power Indicator Light
- Green LED Charging Indicator Light
- Color Coded Battery Clip Adapter
- Color Coded Battery Ring Terminal Adapter
- 84" Total Cord Length (with battery clip adapter)
- 96" Total Cord Length (with battery ring terminal adapter)
- Spark-Proof Connection
- Short Circuit Protection
- 1 Year Limited Warranty

WARRANTY: Lectric Limited, Inc. warrants that for one (1) year from date of purchase, with proof of purchase, it will replace this product if found to be defective in materials or workmanship, when used as directed. If product becomes defective within the warranty period, call 1-708-563-0400 for an RMA (Return Merchandise Authorization) Number and return address. **Returns will not be accepted without an RMA number!** Then, return the product, postage prepaid with proof of purchase to Lectric Limited, Inc. for a prompt, no charge replacement (same or equivalent model). This replacement is Lectric Limited, Inc.'s sole obligation under this warranty. Lectric Limited, Inc. will not be responsible for any incidental or consequential damages or for any loss arising in connection with the use, misuse, or inability to use this product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty excludes defects or damage due to misuse, abuse, or neglect. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

PLEASE READ THE FOLLOWING CAREFULLY: Do not attempt to repair or replace parts in or of this product, or attempt to modify this product in any way from its original form. The buyer assumes all risk and liability arising out of his/her repair, parts replacement or modification to the original product or arising out of his/her installation of this product.

Rev. 01-2014

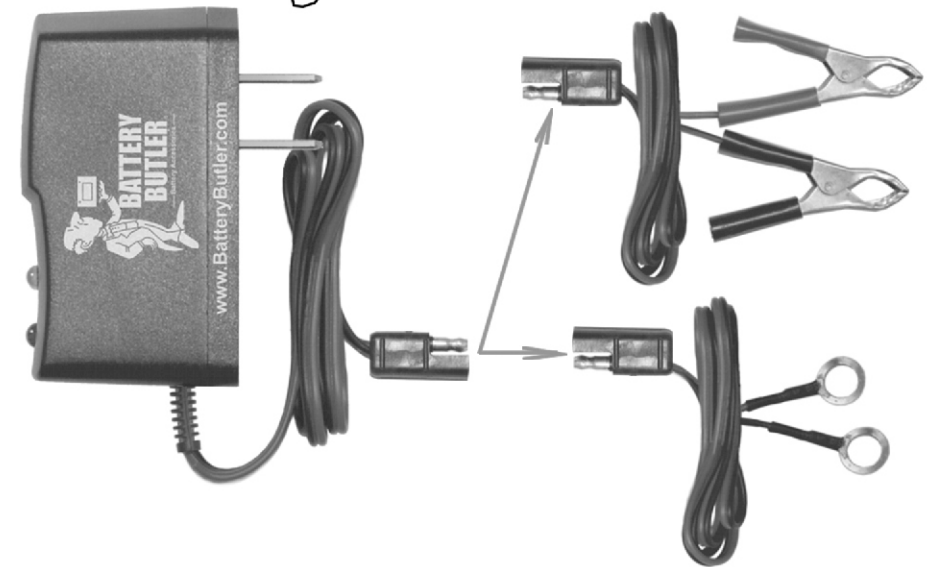

6 Volt Automatic Battery Storage Charger & Maintainer

Part # BBFC200

Lectric Limited, Inc. (708) 563-0400

www.batterybutler.com

6 Volt Automatic Battery Storage Charger - Part #BBFC200

The Battery Butler® battery storage charger is designed for the maintenance of wet or gel-cell batteries that are stored or used periodically in such items as cars, trucks, motorcycles, boats, motorhomes, ATVs, snowmobiles, personal watercrafts, lawn tractors, industrial & farm equipment, etc.

This charger will prevent the self-discharge of your battery, while extending the life of rechargeable 6 volt battery rated from 5 to 125 amp-hours.

It does so by providing a safe, low amperage regulated charge.


Conventional battery chargers deliver a strong, rapid charge that tends to overcharge, boil out battery liquids, and decay battery electrodes. Even trickle chargers are not designed for long term use.

The Battery Butler® battery storage charger is designed for long term use. You can leave it connected to your battery indefinitely!
It's simple to use. *Hook it up. Plug it in, and forget it!*

Specifications:

- Input voltage: 110 volts AC, 60 Hz
 - Output voltage: 7 volts DC, 300~400ma
- For use on 6 volt batteries only.

(Note: A 12 volt version of this charger is also available. Order part #BBFC100)

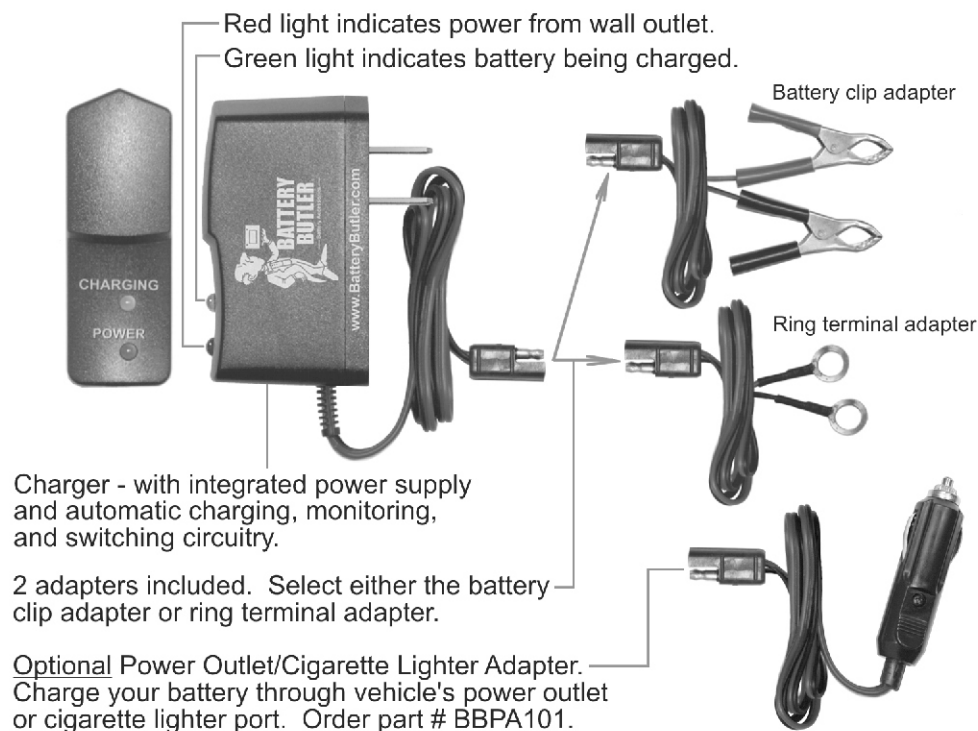

Safety Warnings and Precautions:

- Maintenance-free batteries are non-fillable and have vented slots. Make sure vents are clear and dirt free. This charger will work on a variety of batteries. Consult battery manufacturer for proper charging procedures.
- Do not make connections to battery near flame, sparks or when smoking.
- Make connections to battery before plugging charger into electrical outlet.
- Avoid touching clips together while charger is plugged in.
- Unplug transformer from electrical outlet before disconnecting from battery.
- Surges or sparks in electrical power supply could cause battery explosion. Use of a surge protected outlet is advised.
- As with any wet-cell battery, if possible, periodically check battery's water level. If low, refill with distilled water according to battery manufacturer's instructions. Maintenance-free batteries are not refillable.

DIRECTIONS:

1. Select either the clip or ring-terminal adapter and connect to charger.
2. Connect **RED** clip or ring-terminal to positive (+) terminal of battery.
3. Connect **BLACK** clip or ring-terminal to negative (-) terminal of battery.
4. Plug charger into wall outlet.
5. **Red** light on charger indicates power from wall outlet. It will not light if there is a short circuit or overload on your battery.
6. **Green** light on charger indicates battery is being charged properly. Depending on the condition of your battery, green light will go out or appear to flash once your battery has been fully charged, indicating storage mode.* This charger is designed to maintain a fully charged battery. It is not designed to charge a dead battery (although it may charge a dead battery if left connected for an extended period of time). If your battery is severely undercharged, we recommend to first re-charge it with a conventional battery charger, then use this charger to maintain the battery's charge.

NOTE:

- You may use an extension cord if the charger does not reach your battery.
- You do not have to disconnect your vehicle's battery cable while using this charger.
- * On older batteries, or batteries that can not hold their peak charge, the green light (charging indicator) may stay lit all the time, indicating that the battery is still accepting a small charge. This does not necessarily indicate there is anything wrong with the charger, nor does it indicate that your battery is bad.
- Keep this charger plugged into a wall outlet while connected to your battery. Battery may drain if charger is connected to battery, but unplugged from wall outlet.
- Charger may get warm during normal operation.
- This charger will maintain one battery. Not for use on multiple batteries.